


## Glazing Channel

### Hardware

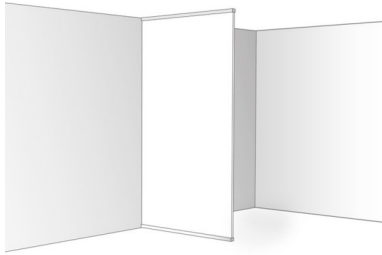

Texture:

Lustre:

Transparency:

<b>DESCRIPTION / FEATURES</b>	Our most common system for installation of screens. Sold as a complete set with top and bottom lengths, end caps and certain thicknesses glazing rubber (suited to thickness of screen purchased)
<b>HOW TO SPECIFY</b>	1. Powdercoat colour 2. Thickness of material being inserted
<b>COMPOSITION</b>	Aluminium
<b>SURFACE FINISH</b>	Satin Black, Satin White or Precious Silver Pearl
<b>FINISHES AVAILABLE</b>	<a href="#">Zintra Plain 1/2" (12mm) Color Range</a> <a href="#">Zintra Timber 1/2" (12mm) Color Range</a>
<b>STANDARD SIZE</b>	48" x 108" x 0.5" (1219mm x 2743mm x 12mm)
<b>INDOOR/OUTDOOR</b>	Indoor only
<b>WET AREAS</b>	No
<b>SUGGESTED INSTALLATION</b>	See Install Guide for details.  Glazing for 10-11mm and 21-24mm comes with 2-part bottom, one-part top and glazing rubber to suit exact thickness of screens.  Glazing for 12-20mm comes with one 32x32mm bottom channel and a 45mm x 32mm top channel. Screen is designed to be slipped up and in

	(supplied shorter than a standard screen assembly). Baresque can
<b>CUSTOMISABLE</b>	No Supply two of the bottom systems only if screens are to be side
<b>THERMOFORMABLE</b>	No Inserted.
<b>FIRE RATING</b>	ASTM E-84 - Class A  E-13501 - B-s2-d0  AS 5637.1:2015 - Group 1
<b>ADDITIONAL COMMENTS</b>	Suitable for Screens, Zintrac Acoustic panel, Lucere and Lightblocks Ice
<b>SUPPLIED AS</b>	1 Glazing System:  1 length 3 metre glazing channel  1 length 3 metre glazing adaptor
<b>FABRICATION</b>	Using 10mm CNC Glazing and oscillating knife
<b>REFINISHABLE</b>	No
<b>CARE INSTRUCTIONS</b>	<p>Remove spills immediately using damp, clean cloth.</p> <p><b>Dab Zintrac</b> with a clean, soft white cloth dampened with a mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.</p> <p>Avoid using wax polishes, solvents or concentrated abrasives.</p> <p>For more difficult stains, dampen a soft white cloth with a solution of household bleach (10% bleach / 90% water). Dab gently. Repeat using only a clean, water dampened cloth to remove bleach concentration then pat dry with a lint free cloth.</p> <p>Always test in an inconspicuous area first. If care instructions don't</p>

	<p>deliver the expected results, cease cleaning method immediately and contact Baresque for assistance.</p>
<b>ENVIRONMENTAL INFORMATION</b>	<p>We believe in the sustainability of both our planet and our people. We do everything we can to minimise our environmental impact and create spaces that contribute to the wellness of the people that use them.</p> <p>Certified by Declare and HPD, Zintrac is made from 100% recyclable materials. It has low levels of volatile organic compounds and contains no formaldehyde. It's Red List Free and meets the Global Recycling Standard.</p> <p>Reducing noise levels, minimizing indoor air pollutants, easy cleaning and a Class A fire rating are just a few of the reasons that Zintrac is the perfect material for the green buildings of today and tomorrow.</p>