


HEXAGONE

Walls - Zindra Textures

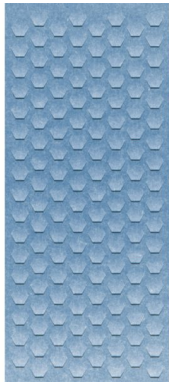

Texture: 3

Lustre: 1

Transparency: 1

DESCRIPTION / FEATURES	<p>Zindra Acoustic Textures not only highlight the fantastic acoustic qualities of Baresque's Zindra Acoustic Panel, but also the incredible fabrication capabilities Baresque has to offer.</p> <p>Zindra Acoustic Textures subtle 3-dimensional relief creates dimension and acoustic attenuation within your space making them ideal for noisy, public spaces. Zindra's wide range of designs and colours slip easily into classic or modern settings. Zindra Acoustic Textures Panel features include:</p> <ul style="list-style-type: none"> * Cost effective sound solution (NRC = 0.45 -0.95) * 2745mm (108") long sheets ideal for join-free floor to ceiling applications * Broad range of neutral and bright colours * Easily fabricated and installed * Pinnable
HOW TO SPECIFY	<ol style="list-style-type: none"> 1. Design 2. Colour
COMPOSITION	<p>Zindra Acoustic Panel - 100% Solution Dyed (Colour Through) Polyester</p>

FINISHES AVAILABLE	Zintra Plain 1/2" (12mm) Color Range Zintra Timber 1/2" (12mm) Color Range
STANDARD SIZE	48" x 108" x 1" (1220mm x 2745mm x 24mm)
WIDTH	MP60 - 150/152cmMP50 - 124/127cmMA50 - 124/127cm (adhesive backing)
ROLL LENGTH	30.5m Available by the lineal metre
WEIGHT	MP50 - 744 g/m ² MP60 - 967g/m ² MA50 (adhesive backing) - 893 g/m ²
INDOOR/OUTDOOR	Indoor only
WET AREAS	No
PATTERN REPEAT	N/A
SUGGESTED INSTALLATION	Zintra Acoustic Textures should be installed using 3M VHB double sided tape (not supplied) as per the Handling Fabrication and Installation guide on the Downloads tab.
CUSTOMISABLE	The Zintra Acoustic Solutions range is customisable to your project. Please get in touch with your local contact for details.
THERMOFORMABLE	No
FIRE RATING	ASTM E-84 – Class A E-13501 – B-s2-d0 AS 5637.1:2015 - Group 1
FABRICATION	Utility knife or CNC with an oscillating knife
REFINISHABLE	No
CARE INSTRUCTIONS	Remove spills immediately using damp, clean cloth. Dab Zintra with a clean, soft white cloth dampened with a mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.

	<p>Avoid using wax polishes, solvents or concentrated abrasives.</p> <p>For more difficult stains, dampen a soft white cloth with a solution of household bleach (10% bleach / 90% water). Dab gently. Repeat using</p>
	<p>only a clean, water dampened cloth to remove bleach concentration then pat dry with a lint free cloth.</p> <p>Always test in an inconspicuous area first. If care instructions don't deliver the expected results, cease cleaning method immediately and contact Baresque for assistance.</p>
ENVIRONMENTAL INFORMATION	<p>We believe in the sustainability of both our planet and our people. We do everything we can to minimise our environmental impact and create spaces that contribute to the wellness of the people that use them.</p> <p>Certified by Declare and HPD, Zintrac is made from 100% recyclable materials. It has low levels of volatile organic compounds and contains no formaldehyde. It's Red List Free and meets the Global Recycling Standard.</p> <p>Reducing noise levels, minimizing indoor air pollutants, easy cleaning and a Class A fire rating are just a few of the reasons that Zintrac is the perfect material for the green buildings of today and tomorrow.</p>