


MOLECULAR

Walls - Zindra Embossed - Ceilings - Zindra Embossed.

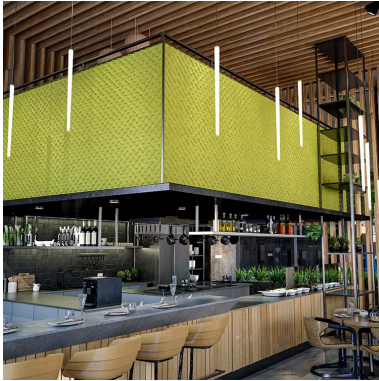

Texture:

Lustre:

Transparency:

DESCRIPTION / FEATURES	Zindra Embossed adds a luxurious feel to Zindra's extensive range of acoustic solutions. Ideal for spaces that not only need noise absorption, but also a sumptuous design element only possible through tactile, three-dimensional surfaces. Zindra's heather adds warmth to what can often be cold, hard spaces, while consistent patterns progressively match across sheets so there is a seamless design that's easy to install as either large panels or ceilings tiles. Zindra Embossed Features: * Suitable for wall cladding or ceilings * designed for easy north/south and east/west pattern matching * 108" (2745mm) sheet size allows join-free floor-to-ceiling and easy fitout * Available in 24 colors and 4 wood effects Download the complete Zindra Embossed brochure
HOW TO SPECIFY	1. Design



	2. Color 3. Wall Panel or Ceiling Tile
COMPOSITION	Zintra Acoustic Panel - 100% Solution Dyed (Colour Through) Polyester
FINISHES AVAILABLE	Zintra Plain 1/2" (12mm) Color Range Zintra Timber 1/2" (12mm) Color Range
STANDARD SIZE	Wall Panels - 108" (2745mm) x 44" (1118mm) Ceiling Tiles - 24" (610mm) x 24" (610mm)
INDOOR/OUTDOOR	Indoor only
WET AREAS	No
SUGGESTED INSTALLATION	Walls - adhere to substrate using contact adhesive or Liquid Nails. Ceilings - lay tiles into ceiling grid
CUSTOMISABLE	The Zintra Acoustic Solutions range is customisable to your project. Please get in touch with your local contact for details.
THERMOFORMABLE	No
BRAND SPEC	ZINTRA
FIRE RATING	ASTM E-84 - Class A E-13501 - B-s2-d0 AS 5637.1:2015 - Group 1
ADDITIONAL COMMENTS	Ceiling Tiles available in a set of 8 Zintra Embossed is only suitable for single sided applications.
FABRICATION	Utility knife or CNC with an oscillating knife
REFINISHABLE	No
CARE INSTRUCTIONS	Remove spills immediately using damp, clean cloth. Dab Zintra with a clean, soft white cloth dampened with a mild solution of liquid detergent and warm water. Repeat using only clean water, then pat dry with a lint free cloth.

	Avoid using wax polishes, solvents or concentrated abrasives. For more difficult stains, dampen a soft white cloth with a solution of household bleach (10% bleach / 90% water). Dab gently. Repeat using only a clean, water dampened cloth to remove bleach
	concentration then pat dry with a lint free cloth. Always test in an inconspicuous area first. If care instructions don't deliver the expected results, cease cleaning method immediately and contact Baresque for assistance.
ENVIRONMENTAL INFORMATION	We believe in the sustainability of both our planet and our people. We do everything we can to minimise our environmental impact and create spaces that contribute to the wellness of the people that use them. Certified by Declare and HPD, Zintrac is made from 100% recyclable materials. It has low levels of volatile organic compounds and contains no formaldehyde. It's Red List Free and meets the Global Recycling Standard. Reducing noise levels, minimizing indoor air pollutants, easy cleaning and a Class A fire rating are just a few of the reasons that Zintrac is the perfect material for the green buildings of today and tomorrow.